

## Type K3


## Ball-Type Grease Nipples



- according to former DIN 3402
- elbow version C/90°
- standard versions are made of steel, zinc-plated and passivated, with tapered thread

GW thread  
L1 overall length  
L2 thread length  
WL angle length  
W angle  
SW HEX size

(all measures in mm,  
thread metric or in inches)

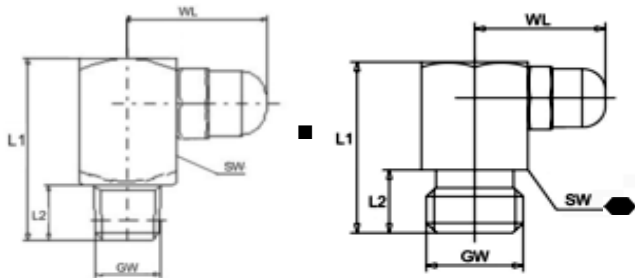

<b>GW</b>	<b>M 6 x 1.0</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
18	5,5	13	90°	9mm SQ. ■	2304504				

<b>GW</b>	<b>M 8 x 1.0</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
18	5,5	13	90°	9mm SQ. ■	2304507				

<b>GW</b>	<b>M 8 x 1.25</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
18	5,5	13	90°	9mm SQ. ■	2304508				
18	5,5	13	90°	9mm HEX ●		2111461 *			
19	5,5	13	90°	11mm HEX ●		2111468 *			

<b>GW</b>	<b>M 10 x 1.0</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
18	5,5	14	90°	11mm SQ. ■	2304709				



<b>GW</b>	<b>M 10 x 1.5 (cyl.)</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
19	5,5	13	90°	11mm HEX	●	2111469 *			

<b>GW</b>	<b>R 1/8, 1/8 - 28 BSP</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
18	5,5	14	90°	11mm SQ.	■	2304756			

<b>GW</b>	<b>R 1/4, 1/4 - 19 BSP</b>				<b>Ref.- No.:</b>				
<b>L1</b>	<b>L2</b>	<b>WL</b>	<b>W</b>	<b>SW</b>	<b>Steel</b>	<b>Brass</b>	<b>SST303</b>	<b>SST316L</b>	
22,5	6,5	15	90°	14mm HEX	●	2301457			

\* cylindric